

6

5

4

-FOLD

3

2

1

421448 - REV

D

C

B

A

C


B

A

PARTS LIST A/N 600691

QTY	DESIG.	DESCRIPTION	PART NO.
1	USB	CONVERTER, ISOLATED, USB TO RS485/422	380005
1	J485	CONN., 9 PIN, SCREW TERMINAL, "D" STYLE, PLUG	331136
1		CABLE, 4 COND., 24 GA. STRANDED W/SHIELD, 6" LG.	324423
1		CABLE TIE, 1/2" DIAM. WRAP	342002
1		TUBING, SHRINK, 3/8 X 5/8	900087
1	R16	RESISTOR, METAL FILM, 121 OHM (DESIG. R16)	211214
1		LABEL, CONVERTER, U485	460275
1		LABEL, "TESTED BY"	460237
1		LABEL, J485	460228
1		CABLE, USB-A MALE TO USB-B MALE, 2 METERS LG.	326049
1		LABEL, CABLE, 326049	460272
1		MANUAL, RS485	700171
1		WIRING DIAGRAM, RS485 INTERCONNECT	421407

U485 ASSEMBLY NO. 600691

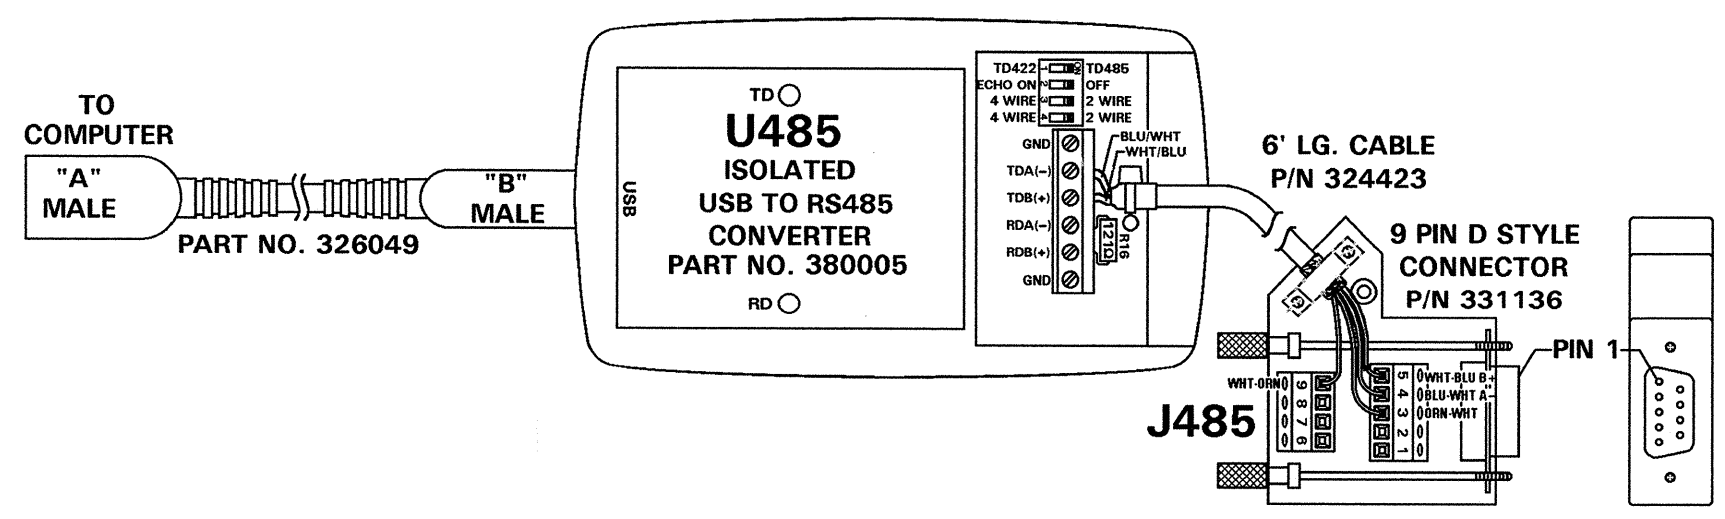

Notes:

1. When provided by Manufacturer send Manual and Diskette included with Converter, Isolated, USB to RS485/422, P/N 380005 to customer.

-		ORIGINAL RELEASE			
REV	AUTH	DESCRIPTION		DRWN BY	CHKD BY
				DATE	DATE
ENTRON 460064					
SCALE	DATE	DRAWN BY	CHK'D BY	APPROVED BY	
<i>1x</i>	<i>10/11/01</i>	<i>RHL</i>			
TOLERANCE UNLESS SPECIFIED			REVISED		
ANGLES: ± 1/2°		REV LTR	APPROVED BY		
DECIMALS: ± .010		DATE			
FRACTIONS: ± 1/64					
WIRING DIAGRAM, CONVERTER, U485					
NEXT ASSM/USED ON		DRAWING NUMBER		REV	
ASSEM 600691		421448 -			

5

4

-FOLD

3

2

1

605923